


Résumé

Cette carte présente le potentiel de construction et les types de fondations selon les conditions de pergélisol et les pentes de la région de Kuujuaq. Ce village se situe au Nunavut, le long de la rivière Koksoak, à près de 50 km de l'embouchure de la baie d'Ungava (58.06° N; 68.24° O).

Note

Cette carte a été compilée principalement par photo-interprétation et validée avec un nombre limité d'observations de terrain, de sondages et de forages dans le pergélisol. Toute information pouvant améliorer la précision et éventuellement conduire à la production d'une mise à jour sera appréciée.

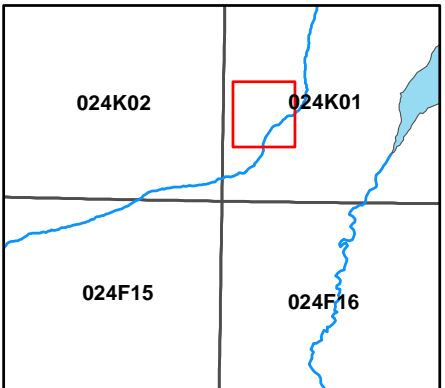

The National Topographic System of Canada
Vector edition: 02 of the National Topographic System of Canada
Government of Canada, Natural Resources Canada, Earth Sciences
Branch, Mapping Information Branch, Centre for Topographic Information (2000).

Cover illustration:
Kuujuaq, Nunavut, Québec.
Photocredits: Sarah Aubé-Michaud,
Centre d'études nordiques, Québec, 2018

Construction potential and foundation design options based on permafrost conditions and slopes
KUUJJUAQ
Québec, Nunavik
1 : 12 000



Hillshade created by L'Hérault, E.
from LiDAR data (MRNF 2010,
gouvernement du Québec).
Illumination: azimuth 315°, altitude
45°, vertical exaggeration 1x

Projection: MTM zone 6, NAD83

Construction potential and foundation design options based on permafrost conditions and slopes

KUUJJUAQ
Québec, Nunavik
1 : 12 000



- THAW-STABLE GROUND: BEDROCK AND SUPERFICIAL DEPOSITS WITH NO OR LITTLE ICE CONTENT**
- 1a
- Proterozoic age volcanic bedrock, sometimes covered by a thin layer of sand, gravel, or blocks. Active layer thickness is generally about 4 m. Rock joints may contain a small amount of ice.
 - All types of northern foundations. Adaptations to rugged topography are often necessary.
- Terrain manageable for construction (slope < 7.5°)
Terrain manageable for construction but may require significant earthwork (slope between 7.5 and 15°)
Terrain unsuitable for construction (slope > 15°)
- 1b
- Thin cover of sand and gravel over bedrock. The thickness of the deposit is generally less than 2 m and the topography is controlled by bedrock. Presence of scattered rock outcrops. The active layer thickness is generally ranging from 1.5 to 2.5 m. Contains pore ice whose volume is generally less than 10%.
 - Deep northern foundations on the underlying bedrock applicable (ex.: pile foundations). Adjustable post and pad foundations also feasible. Buildings with slab-on-grade foundations need elaborated techniques of terrain preparation (ex.: removal or pre-thaw of frozen sediments and consolidation).
- Terrain manageable for construction (slope < 7.5°)
Terrain manageable for construction but may require significant earthwork (slope between 7.5 and 15°)
Terrain unsuitable for construction (slope > 15°)
- 1c
- Deposit of thick stratified sand and gravel. The deposit is generally greater than 2 m thick. Nearshore sand and gravel (Mn) appear in the form of a succession of arched concordant beds. The active layer thickness is generally ranging from 1.5 to 2.5 m. Contains pore ice and occasional ice lenses may be present in fine-grained material layers. Possibility of ice wedges occurrence.
 - Northern foundations on adjustable post and pad or on piles. Buildings with slab-on-grade foundations might need elaborated techniques to retain permafrost in its frozen state (ex.: thermosyphons).
- Terrain manageable for construction (slope < 5°)
Terrain manageable for construction but may require significant earthwork (slope between 5 and 10°)
Terrain unsuitable for construction (slope > 10°)
- THAW-UNSTABLE GROUND: ICE-RICH PERMAFROST IN SUPERFICIAL DEPOSITS**
- 2a
- Thin cover of heterogeneous deposit (Bt) over bedrock. Composed mainly of sand and silt with some gravel and boulders. The thickness of the deposit is generally less than 2 m and the topography is controlled by bedrock. Presence of scattered rock outcrops. The active layer thickness is generally ranging from 2.5 to 3 m. Contains pore ice and ice lenses in fine-grained material layers. The volumetric ice content is generally less than 30%. Occurrence of mudboils and gelifraction lobes on slopes. Creep and differential settlements may occur upon thawing, but are limited due to the shallow thickness of the deposit.
 - Deep northern foundations on the underlying bedrock applicable (ex.: pile foundations). Adjustable post and pad foundations also feasible. Buildings with slab-on-grade foundations need elaborated techniques of terrain preparation (ex.: removal or pre-thaw of frozen sediments and consolidation).
- Terrain manageable for construction (slope < 4°)
Terrain manageable for construction but may require significant earthwork (slope between 4 and 8°)
Terrain unsuitable for construction (slope > 8°)
- 2b
- Thick cover of heterogeneous deposit (Bt) over bedrock. Composed mainly of sand and silt with some gravel and boulders. The thickness of the deposit is generally more than 2 m and can reach over 10 m with occasional bedrock outcrop. The active layer thickness is generally ranging from 2.5 to 3 m. Contains pore ice and ice lenses in fine-grained material layers. The volumetric ice content is generally less than 30%. Occurrence of mudboils and gelifraction lobes on slopes. Creep and differential settlements may occur upon thawing, but are limited due to the shallow thickness of the deposit.
 - Pile foundations feasible but require deeper drill-holes for pile driving. Adjustable post and pad foundations also feasible. Buildings with slab-on-grade foundations need elaborated techniques to retain permafrost in its frozen state (ex.: thermosyphons). Excavation shall be avoided.
- Terrain manageable for construction, but caution is needed (slope < 8°)
Terrain unsuitable for construction (slope > 8°)
- 2c
- Thin cover of fine-grained (fine sand, silt and clay) deposit of marine or lacustrine origin over bedrock or a thick layered sand and gravel deposit. The thickness of the deposit is generally less than 2 m and the topography is controlled by bedrock. Presence of scattered rock outcrops. The active layer thickness is ranging from 0.5 to 1.5 m. Contains ice lenses. The volumetric ice content regularly exceeds 30% and may reach almost 100%. Surface often marked by mudboils. Material subject to minimal differential settlements because of its shallow depth. Material subject to failure on slopes upon thawing.
 - Deep northern foundations on the underlying bedrock applicable (ex.: pile foundations). Adjustable post and pad foundations also feasible. Buildings with slab-on-grade foundations need elaborated techniques of terrain preparation (ex.: removal or pre-thaw of frozen sediments and consolidation).
- Terrain manageable for construction, but caution is needed (slope < 2°)
Terrain unsuitable for construction (slope > 2°)
- 2d
- Fine-grained deposit of marine origin (sand, silt and clay) sometimes covered with a thin layer of organic, alluvial or littoral sediments. Poorly drained. The active layer thickness is ranging from 0.5 to 1.5 m. Contains ice lenses. The volumetric ice content regularly exceeds 30% and may reach almost 100%. Possibility of ice wedges occurrence. Material subject to significant differential settlements and failure on slopes upon thawing.
 - Adjustable post and pad foundations. Buildings with slab-on-grade foundations need elaborated techniques to retain permafrost in its frozen state (ex.: thermosyphons). Excavation shall be avoided.
- Terrain unsuitable for construction.

SEVERE LIMITATIONS: DYNAMIC ACTIVE PERIGLACIAL AND SLOPE PROCESSES, LITTORAL ZONE OR FLOODPLAINS

- 3
- Contemporary deposit affected by current and dynamic geomorphological processes. Subjects to erosion, flooding and slope movements.
 - Problematic terrains to be avoided.
- Problematic terrain unsuitable for construction.

- LITHALSAS
SAND OR GRAVEL PIT (active or inactive)
QUARRY (active or inactive)
BUILDING
TRANSPORT INFRASTRUCTURE
GEOLOGICAL UNIT BOUNDARY
WATERCOURSE - creek or stream running occasionally during spring melt
WATERCOURSE - creek or stream running throughout all arctic summer
ISOLATED ROCK OUTCROP

Authors: A.-S. Carboneau, Poly-Géo inc., S. Aubé-Michaud and M. Allard
Centre d'études nordiques, Université Laval, December 2018

Recommended citation:
Carboneau, A.-S., Poly-Géo inc., Aubé-Michaud, S. and Allard, M., 2018. Construction potential and foundation design options based on permafrost conditions and slopes, Kuujuaq, Québec, Nunavut, Centre d'études nordiques, scale 1:12 000.